


## Cat6 STP Keystone Jacks

D-Link Category 6 keystone jacks are RJ45 8P 8C 50u jacks suitable for 22-26 AWG stranded and solid wire & it's toolless. They are capable of re-termination. They are available in universal labels color coded for T568A and T568B wiring schemes and fit in high density keystone patch panel. It supports IEC 60603-7- 4 and complied with ANSI/TIA/EIA-568-C.2 standard.

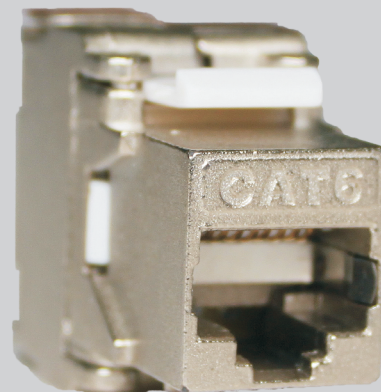

### SPECIFICATIONS

RJ45 Jack:	Housing- Zinc Alloy
RJ45 Jack Contact:	Material- phosphor bronze Stamp Pin T= .35mm Finish: 50 micro-inch gold plated on plug contact area
IDC:	Phosphor bronze Pin T=0.50mm with tin plating
IDC CAP:	PC, UL 94V-2
Insertion Cycles:	750 times
IDC Life:	200 times Min.
Wire:	AWG 22-24
Operating Temperature:	-10°C to 60°C
Storage Temperature:	-40°C to 70°C
Current Rating:	1.5A
Voltage Rating:	125 VAC RMS
Insulation Resistance:	100 Megaohms min @ 500V DC
Dielectric Withstand Voltage:	750 VAC RMS @ 60Hz
Contact Resistance:	20 milliohms

### ORDERING INFORMATION

CAT6 STP Keystone Jacks	
Part Code	Description
NKJ-C6SWHI1B21	CAT6 STP Keystone Jack

**D-Link (India) Limited**  
Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059  
Specifications are subject to change without notice.  
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners.  
©2018 D-Link Corporation. All rights reserved. Release 01 (May 2018)